



MODULAR
LIGHTING
INSTRUMENTS
— by MLI NA Corporation

MP3.1





MP 3.1

MP3.1 is one of the thinnest profiles on the market. In combination with LED lines, LED spotlights or the directional spotlight Rektor, the MP3.1 is your ideal ally for any project in which you wish to provide both basic and accent lighting with a single fixture.

Versatile lighting.

MP3.1 is a LED designated profile. For general lighting, use LED lines. For accent lighting, LED spotlights are available in warm or neutral white, in single or double lamp modules. With its sleek looks, the Rektor directional surface-mounted spotlight is a perfect match for the MP3.1 and makes the profile particularly versatile.

Ingenious and sleek.

It's 3.1" width and 1.4" height makes it a very slim fixture. An ingenious detail is that the heat is automatically conducted away by the aluminium housing. The standard finished are a white or black structure. You can also create your own color combinations by choosing a base plate and top plate in different colors. MP3.1 can be either surface mounted or suspended.

version	Surface Suspended
lamp units	Ledline - 3ft, 4ft, 5ft, 6ft, 7ft Recessed spot Rektor
colors	black structure, white structure
mounting	plaster plate for 4"x4" jbox
output	Ledline - 575lm/ft Recessed spot - up to 1517lm Rektor - up to 1500lm
power	ledline - 8.6W/ft recessed spot - 16.2W Rektor - 16.2W
cct	2700K, 3000K
cri	>90, R9>50
optics	ledline - opal diffuser recessed spot, Rektor - 25°, 40°
voltage	120-277V
dimming	ledline - 0-10V 5%, ELV 5% recessed spot, Rektor - 0-10V 5%, ELV/ Triac/0-10V 1%
adjustability	Rektor - h 360° v 90°
location	dry rated
- more info?	supermodular.com/en-us/mp3.1/








MODULAR
LIGHTING -
INSTRUMENTS



MP3.1 SUSPENDED, REKTOR SURFACE



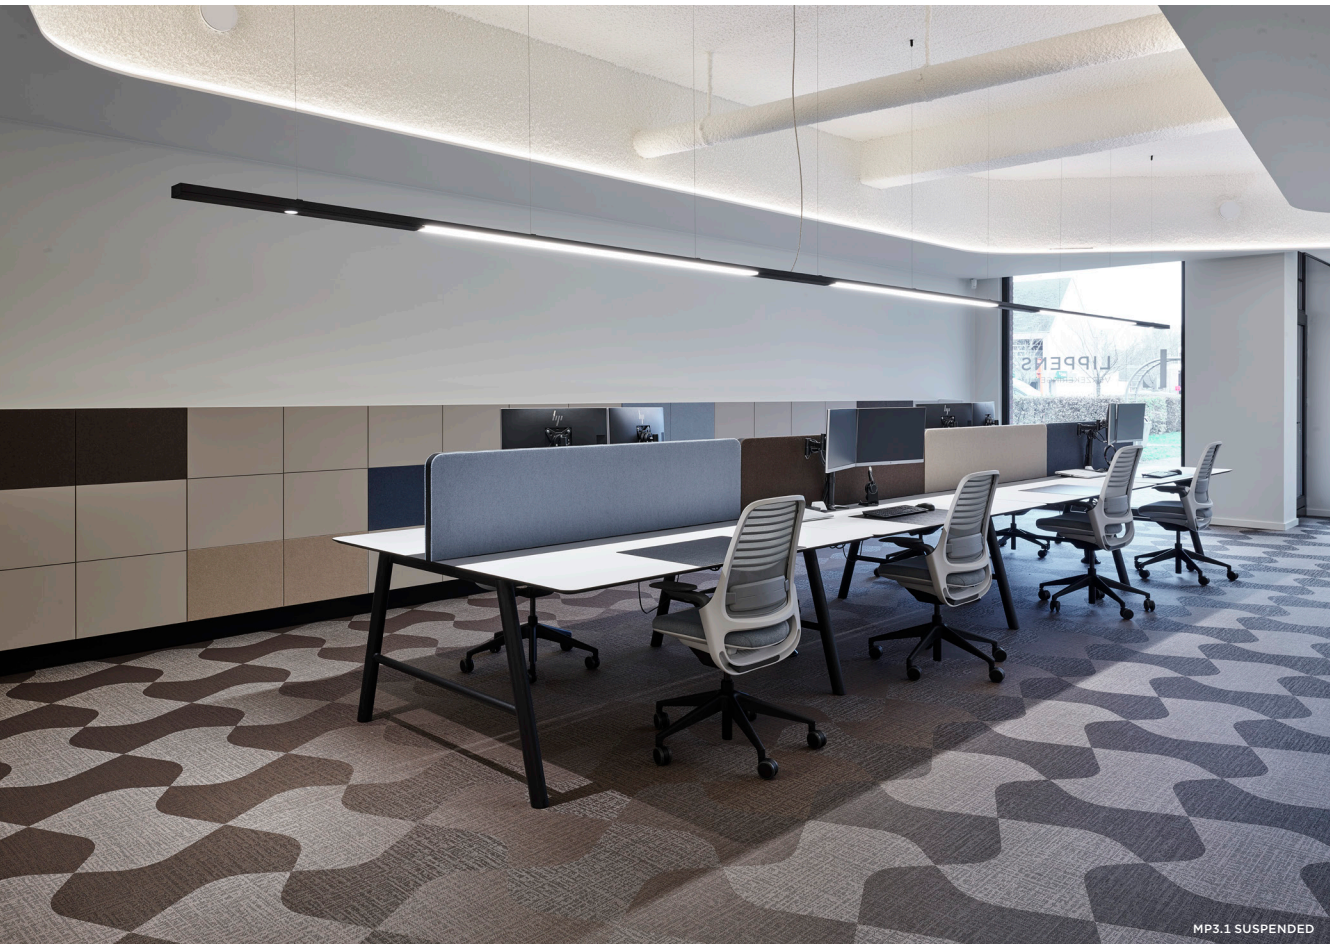



Tel: +1 800 674 9691
welcome.us@supermodular.com – www.supermodular.com